


300M Universal Beam Clamp – 30013MM (389520)

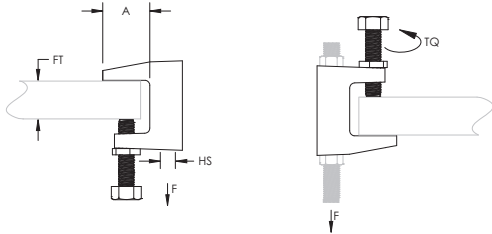

Part Number	30013MM
Article Number	389520
Material	Cast Iron
Finish	Electrogalvanized
Hole Type	Plain
Hole Size (HS)	13 mm
Flange Thickness (FT)	26 mm Max
A	35 mm
Torque [TQ]	14 N-m
Static Load (F)	3.500 N
Certifications	FM VdS
Standard Packaging Quantity	80 pc
UPC	78285684489
EAN-13	8711893003734

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

FM is a registered certification mark of FM Approvals LLC, LTD. VdS is a registered trademark of VdS Schadenverhütung GmbH.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.


© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.



300M Universal Beam Clamp – 30009MM (389500)

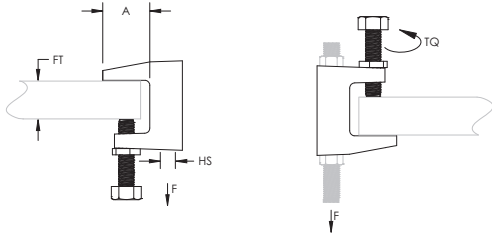

Part Number	30009MM
Article Number	389500
Material	Cast Iron
Finish	Electrogalvanized
Hole Type	Plain
Hole Size (HS)	9 mm
Flange Thickness (FT)	18 mm Max
A	21 mm
Torque [TQ]	14 N-m
Static Load (F)	1,200 N
Certifications	VdS
Standard Packaging Quantity	100 pc
UPC	78285684487
EAN-13	8711893003727

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

VdS is a registered trademark of VdS Schadenverhütung GmbH.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.


© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.



300M Universal Beam Clamp – 30011MM (389510)

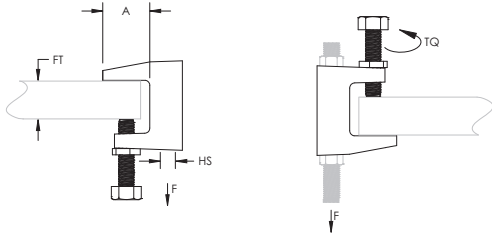

Part Number	30011MM
Article Number	389510
Material	Cast Iron
Finish	Electrogalvanized
Hole Type	Plain
Hole Size (HS)	11 mm
Flange Thickness (FT)	20 mm Max
A	23 mm
Torque [TQ]	14 N-m
Static Load (F)	2,500 N
Certifications	FM VdS
Standard Packaging Quantity	100 pc
UPC	78285684488
EAN-13	8711893003710

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

FM is a registered certification mark of FM Approvals LLC, LTD. VdS is a registered trademark of VdS Schadenverhütung GmbH.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

